
AUGUST 1993 - REVISED MARCH 1997

- **Designed for Complementary Use with BD896, BD898, BD900 and BD902**
- **70 W at 25°C Case Temperature**
- **8 A Continuous Collector Current**
- **Minimum h_{FE} of 750 at 3V, 3A**

TO-220 PACKAGE (TOP VIEW)

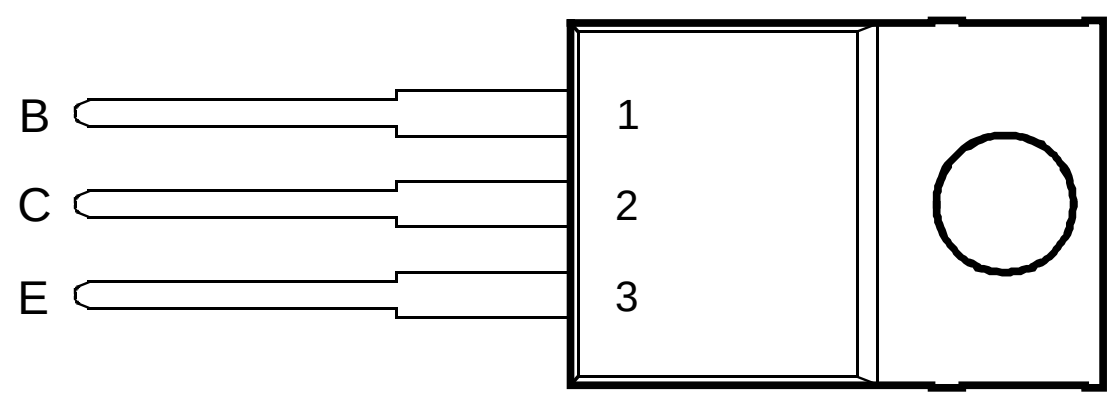

Pin 2 is in electrical contact with the mounting base.

MDTRACA

absolute maximum ratings at 25°C case temperature (unless otherwise noted)

RATING		SYMBOL	VALUE	UNIT
Collector-base voltage (I_E = 0)	BD895	V_{CBO}	45	V
	BD897		60	
	BD899		80	
	BD901		100	
Collector-emitter voltage (I_B = 0)	BD895	V_{CEO}	45	V
	BD897		60	
	BD899		80	
	BD901		100	
Base-emitter voltage		V_{EBO}	5	V
Continuous collector current		I_C	8	A
Continuous base current		I_B	0.3	A
Continuous device dissipation at (or below) 25°C case temperature (see Note 1)		P_{tot}	70	W
Continuous device dissipation at (or below) 25°C free air temperature (see Note 2)		P_{tot}	2	W
Operating free-air temperature range		T_A	-65 to +150	°C
Operating junction temperature range		T_j	-65 to +150	°C
Storage temperature range		T_{stg}	-65 to +150	°C

NOTES: 1. Derate linearly to 150°C case temperature at the rate of 0.56 W/°C.
2. Derate linearly to 150°C free air temperature at the rate of 16 mW/°C.

AUGUST 1993 - REVISED MARCH 1997

electrical characteristics at 25°C case temperature (unless otherwise noted)

PARAMETER		TEST CONDITIONS				MIN	TYP	MAX	UNIT
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	I_C = 100 mA	I_B = 0	(see Note 3)	BD895 BD897 BD899 BD901	45 60 80 100			V
I_{CEO}	Collector-emitter cut-off current	V_{CE} = 30 V V_{CE} = 30 V V_{CE} = 40 V V_{CE} = 50 V	I_B = 0 I_B = 0 I_B = 0 I_B = 0		BD895 BD897 BD899 BD901			0.5 0.5 0.5 0.5	mA
I_{CBO}	Collector cut-off current	V_{CB} = 45 V V_{CB} = 60 V V_{CB} = 80 V V_{CB} = 100 V V_{CB} = 45 V V_{CB} = 60 V V_{CB} = 80 V V_{CB} = 100 V	I_E = 0 I_E = 0 I_E = 0 I_E = 0 I_E = 0 I_E = 0 I_E = 0 I_E = 0	 T_C = 100°C T_C = 100°C T_C = 100°C T_C = 100°C	BD895 BD897 BD899 BD901 BD895 BD897 BD899 BD901			0.2 0.2 0.2 0.2 2 2 2 2	mA
I_{EBO}	Emitter cut-off current	V_{EB} = 5 V	I_C = 0	(see Notes 3 and 4)				2	mA
h_{FE}	Forward current transfer ratio	V_{CE} = 3 V	I_C = 3 A	(see Notes 3 and 4)		750			
$V_{CE(sat)}$	Collector-emitter saturation voltage	I_B = 12 mA	I_C = 3 A	(see Notes 3 and 4)				2.5	V
$V_{BE(on)}$	Base-emitter voltage	V_{CE} = 3 V	I_C = 3 A	(see Notes 3 and 4)				2.5	V
V_F	Parallel diode forward voltage	I_F = 8 A						3.5	V

NOTES: 3. These parameters must be measured using pulse techniques, t_p = 300 µs, duty cycle ≤ 2%.
4. These parameters must be measured using voltage-sensing contacts, separate from the current carrying contacts.

thermal characteristics

PARAMETER		MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction to case thermal resistance			1.79	°C/W
$R_{\theta JA}$	Junction to free air thermal resistance			62.5	°C/W

resistive-load-switching characteristics at 25°C case temperature

PARAMETER		TEST CONDITIONS †			MIN	TYP	MAX	UNIT
t_{on}	Turn-on time	I_C = 3 A	$I_{B(on)}$ = 12 mA	$I_{B(off)}$ = -12 mA		1		µs
t_{off}	Turn-off time	$V_{BE(off)}$ = -3.5 V	R_L = 10 Ω	t_p = 20 µs, dc ≤ 2%		5		µs

† Voltage and current values shown are nominal; exact values vary slightly with transistor parameters.

TYPICAL CHARACTERISTICS

TYPICAL DC CURRENT GAIN vs COLLECTOR CURRENT

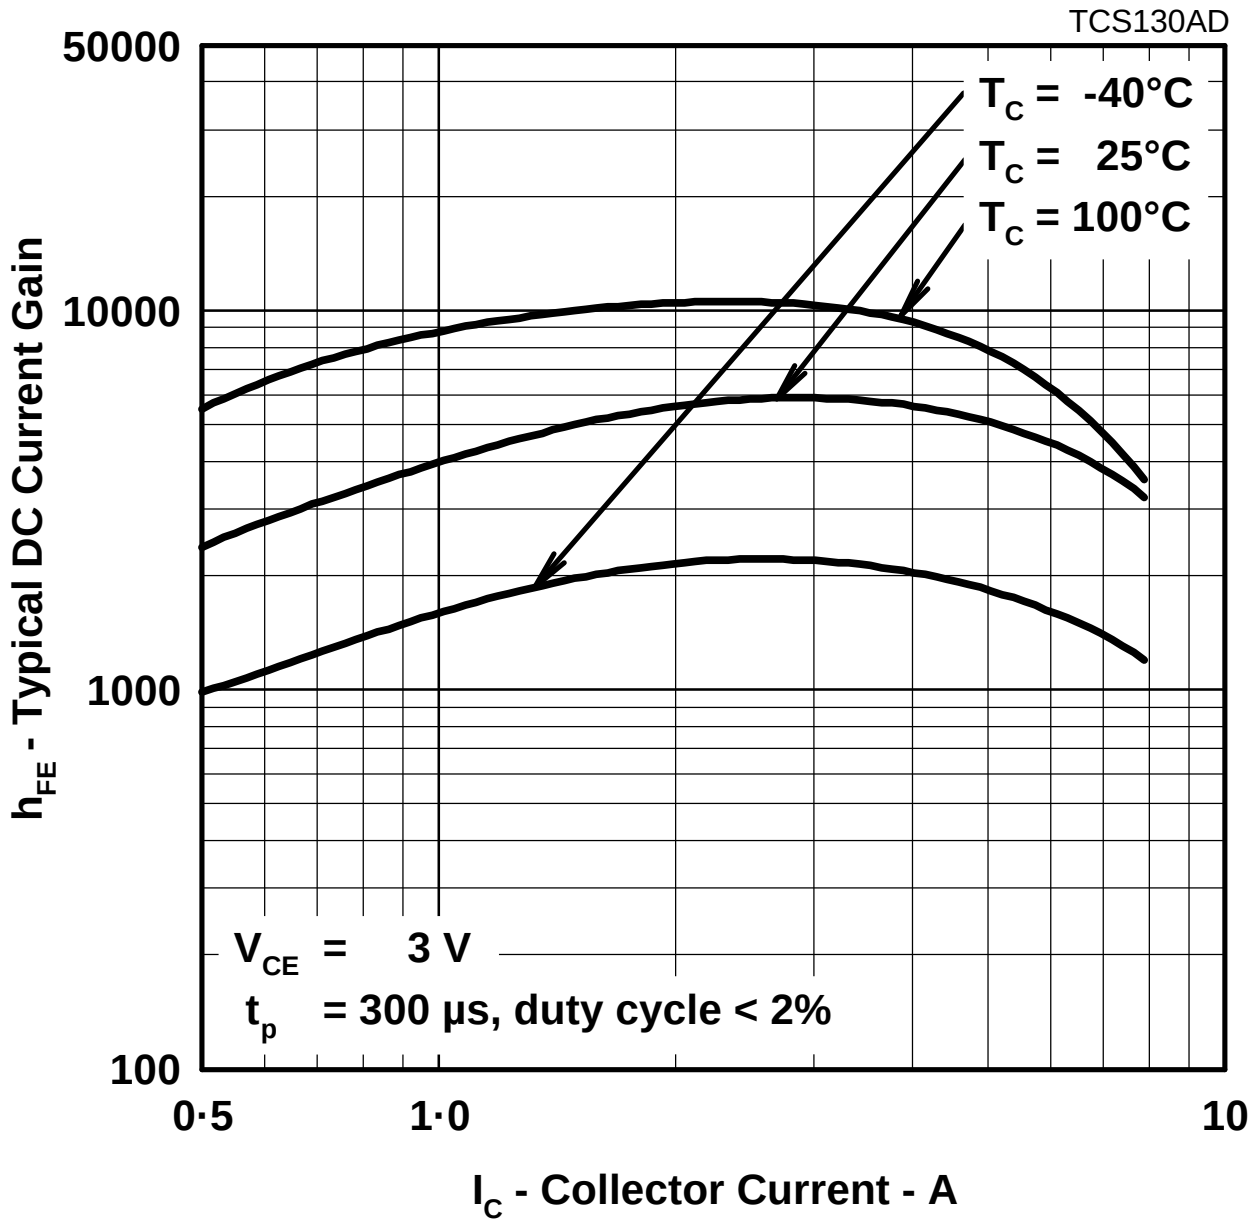


Figure 1.

COLLECTOR-EMITTER SATURATION VOLTAGE vs COLLECTOR CURRENT

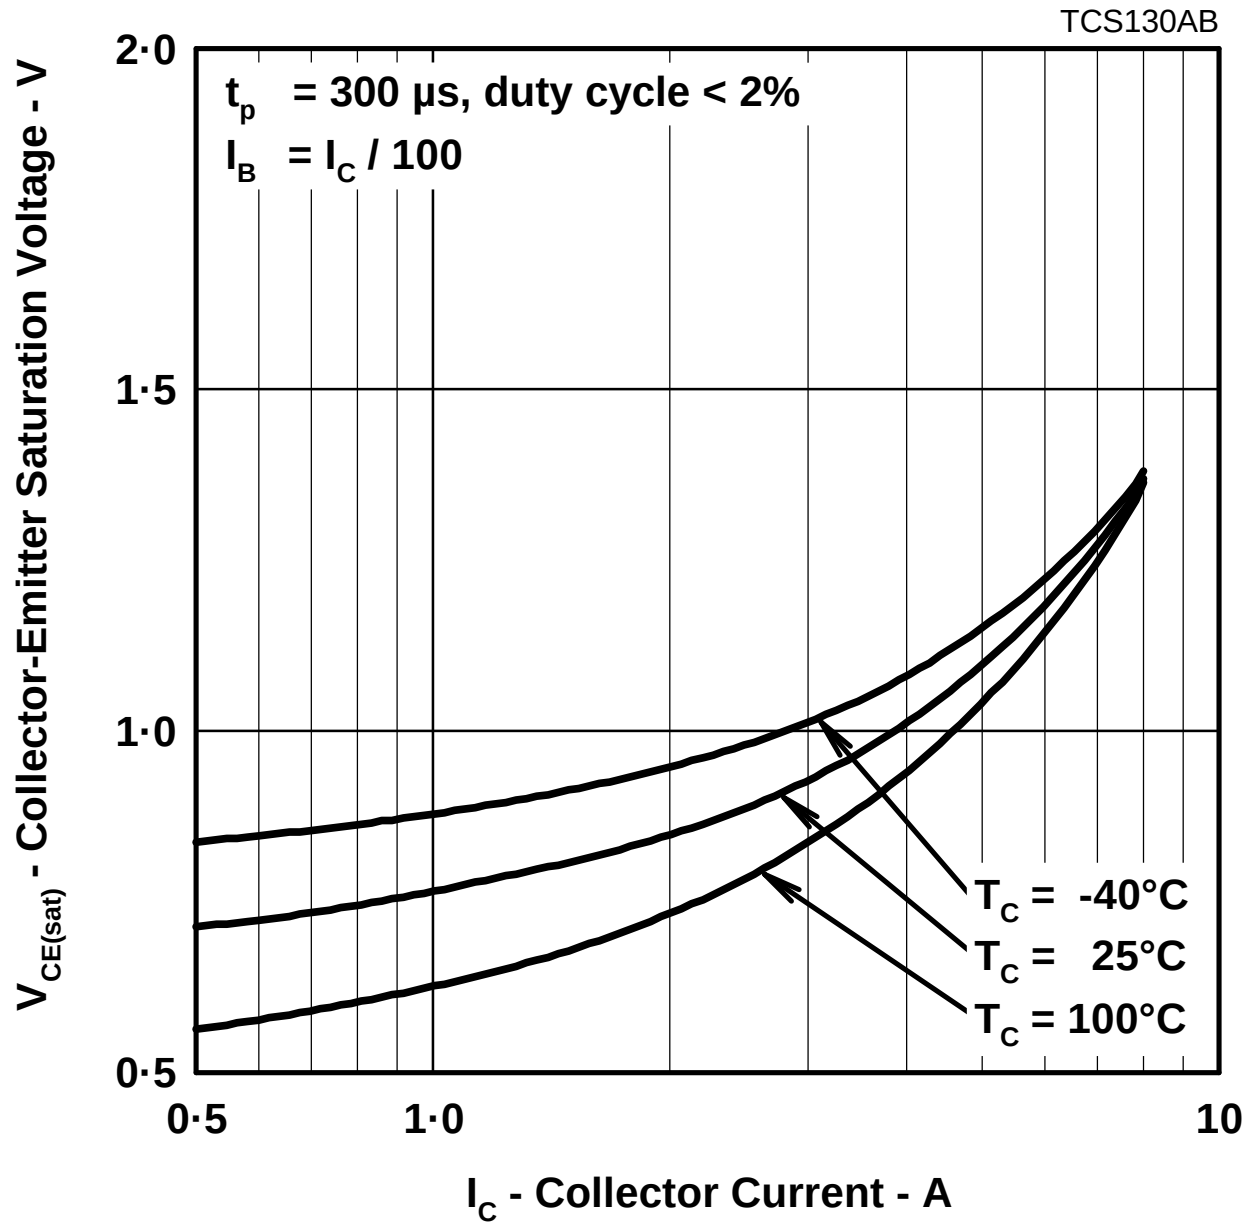


Figure 2.

BASE-EMITTER SATURATION VOLTAGE vs COLLECTOR CURRENT

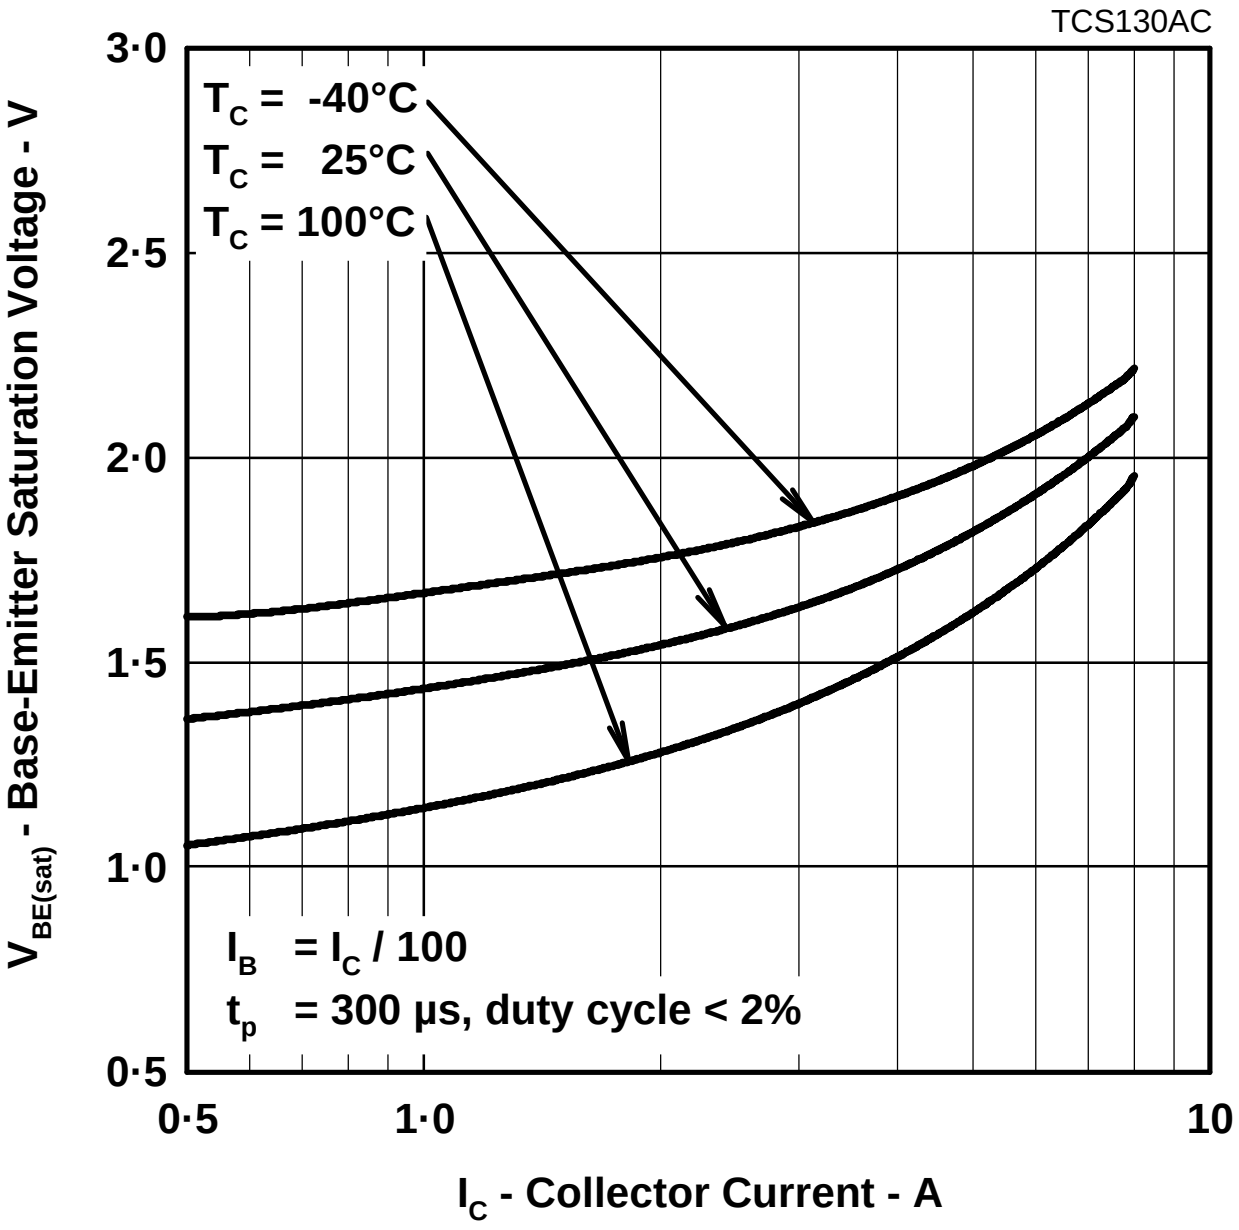


Figure 3.

MAXIMUM SAFE OPERATING REGIONS

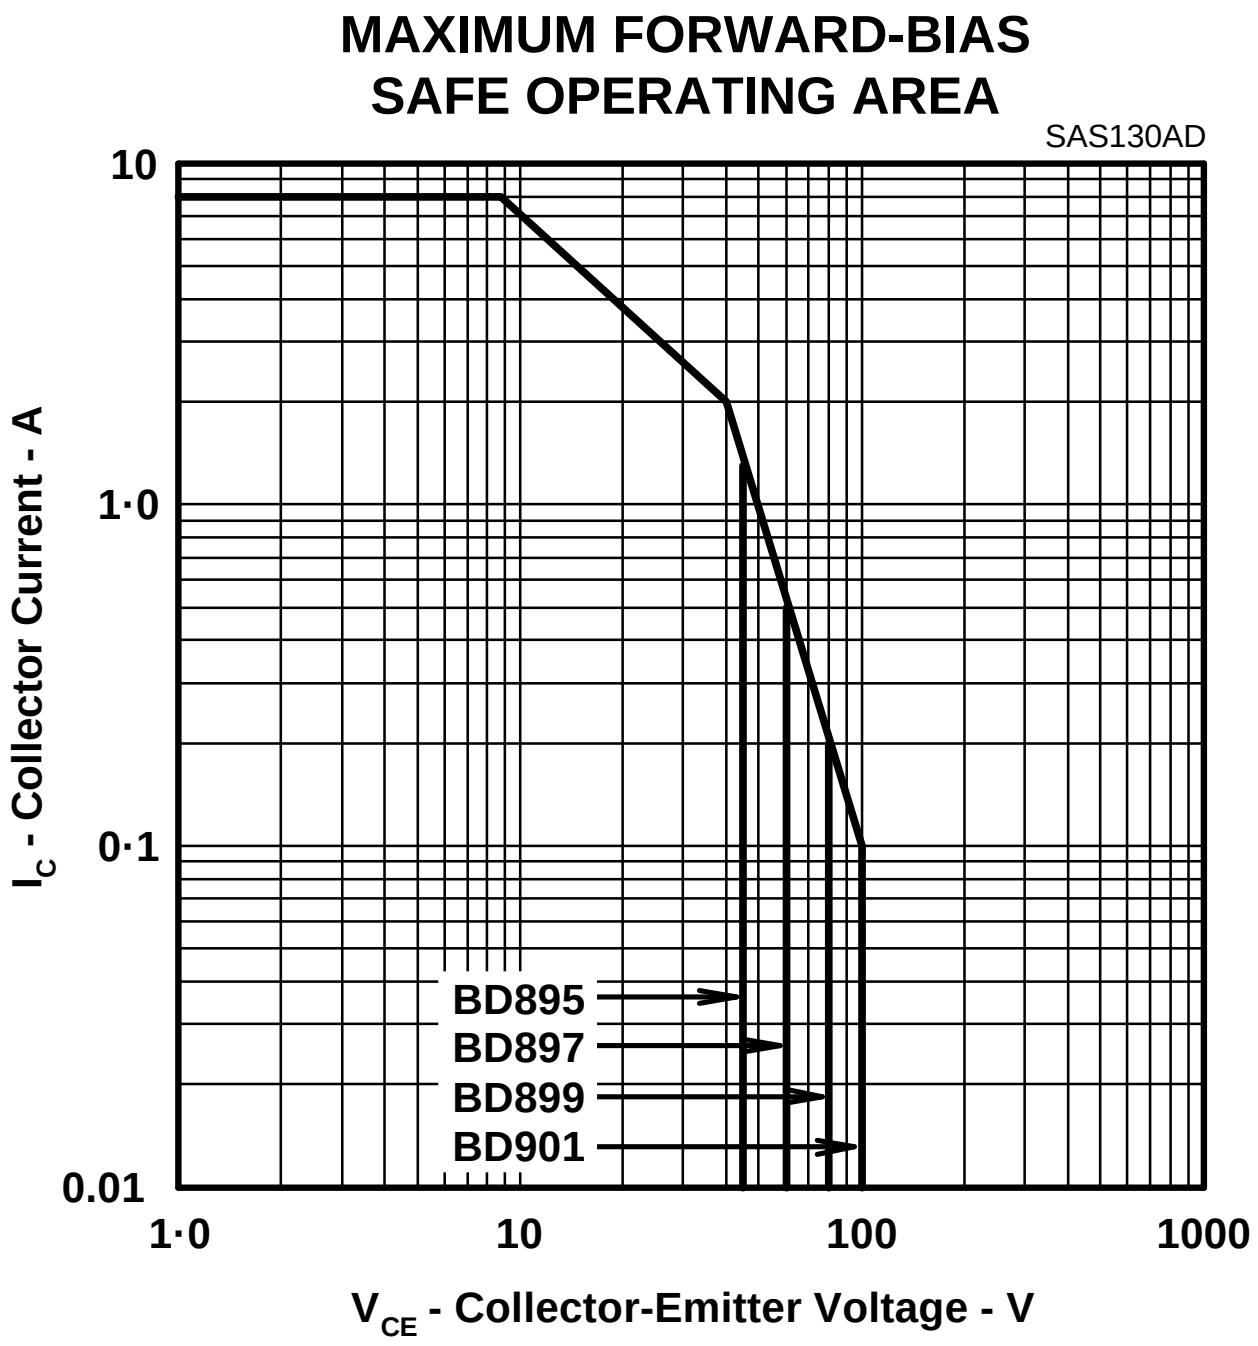


Figure 4.

THERMAL INFORMATION


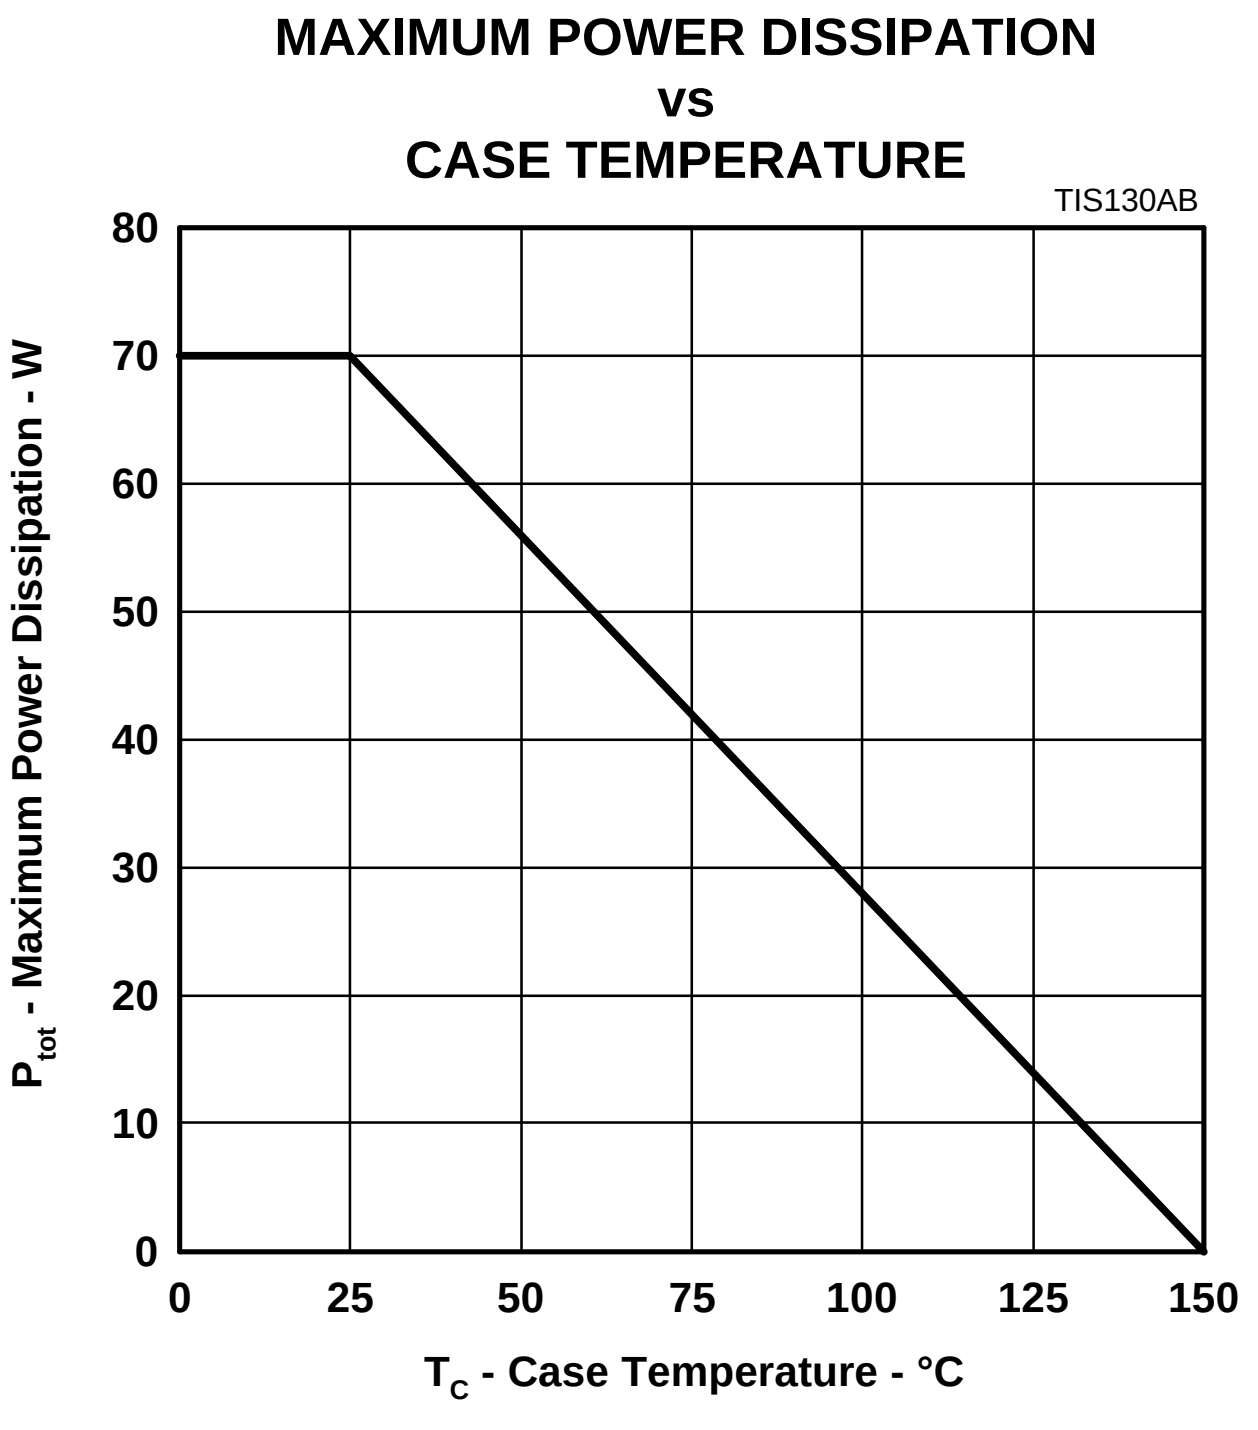


Figure 5.

MECHANICAL DATA

TO-220
3-pin plastic flange-mount package

This single-in-line package consists of a circuit mounted on a lead frame and encapsulated within a plastic compound. The compound will withstand soldering temperature with no deformation, and circuit performance characteristics will remain stable when operated in high humidity conditions. Leads require no additional cleaning or processing when used in soldered assembly.

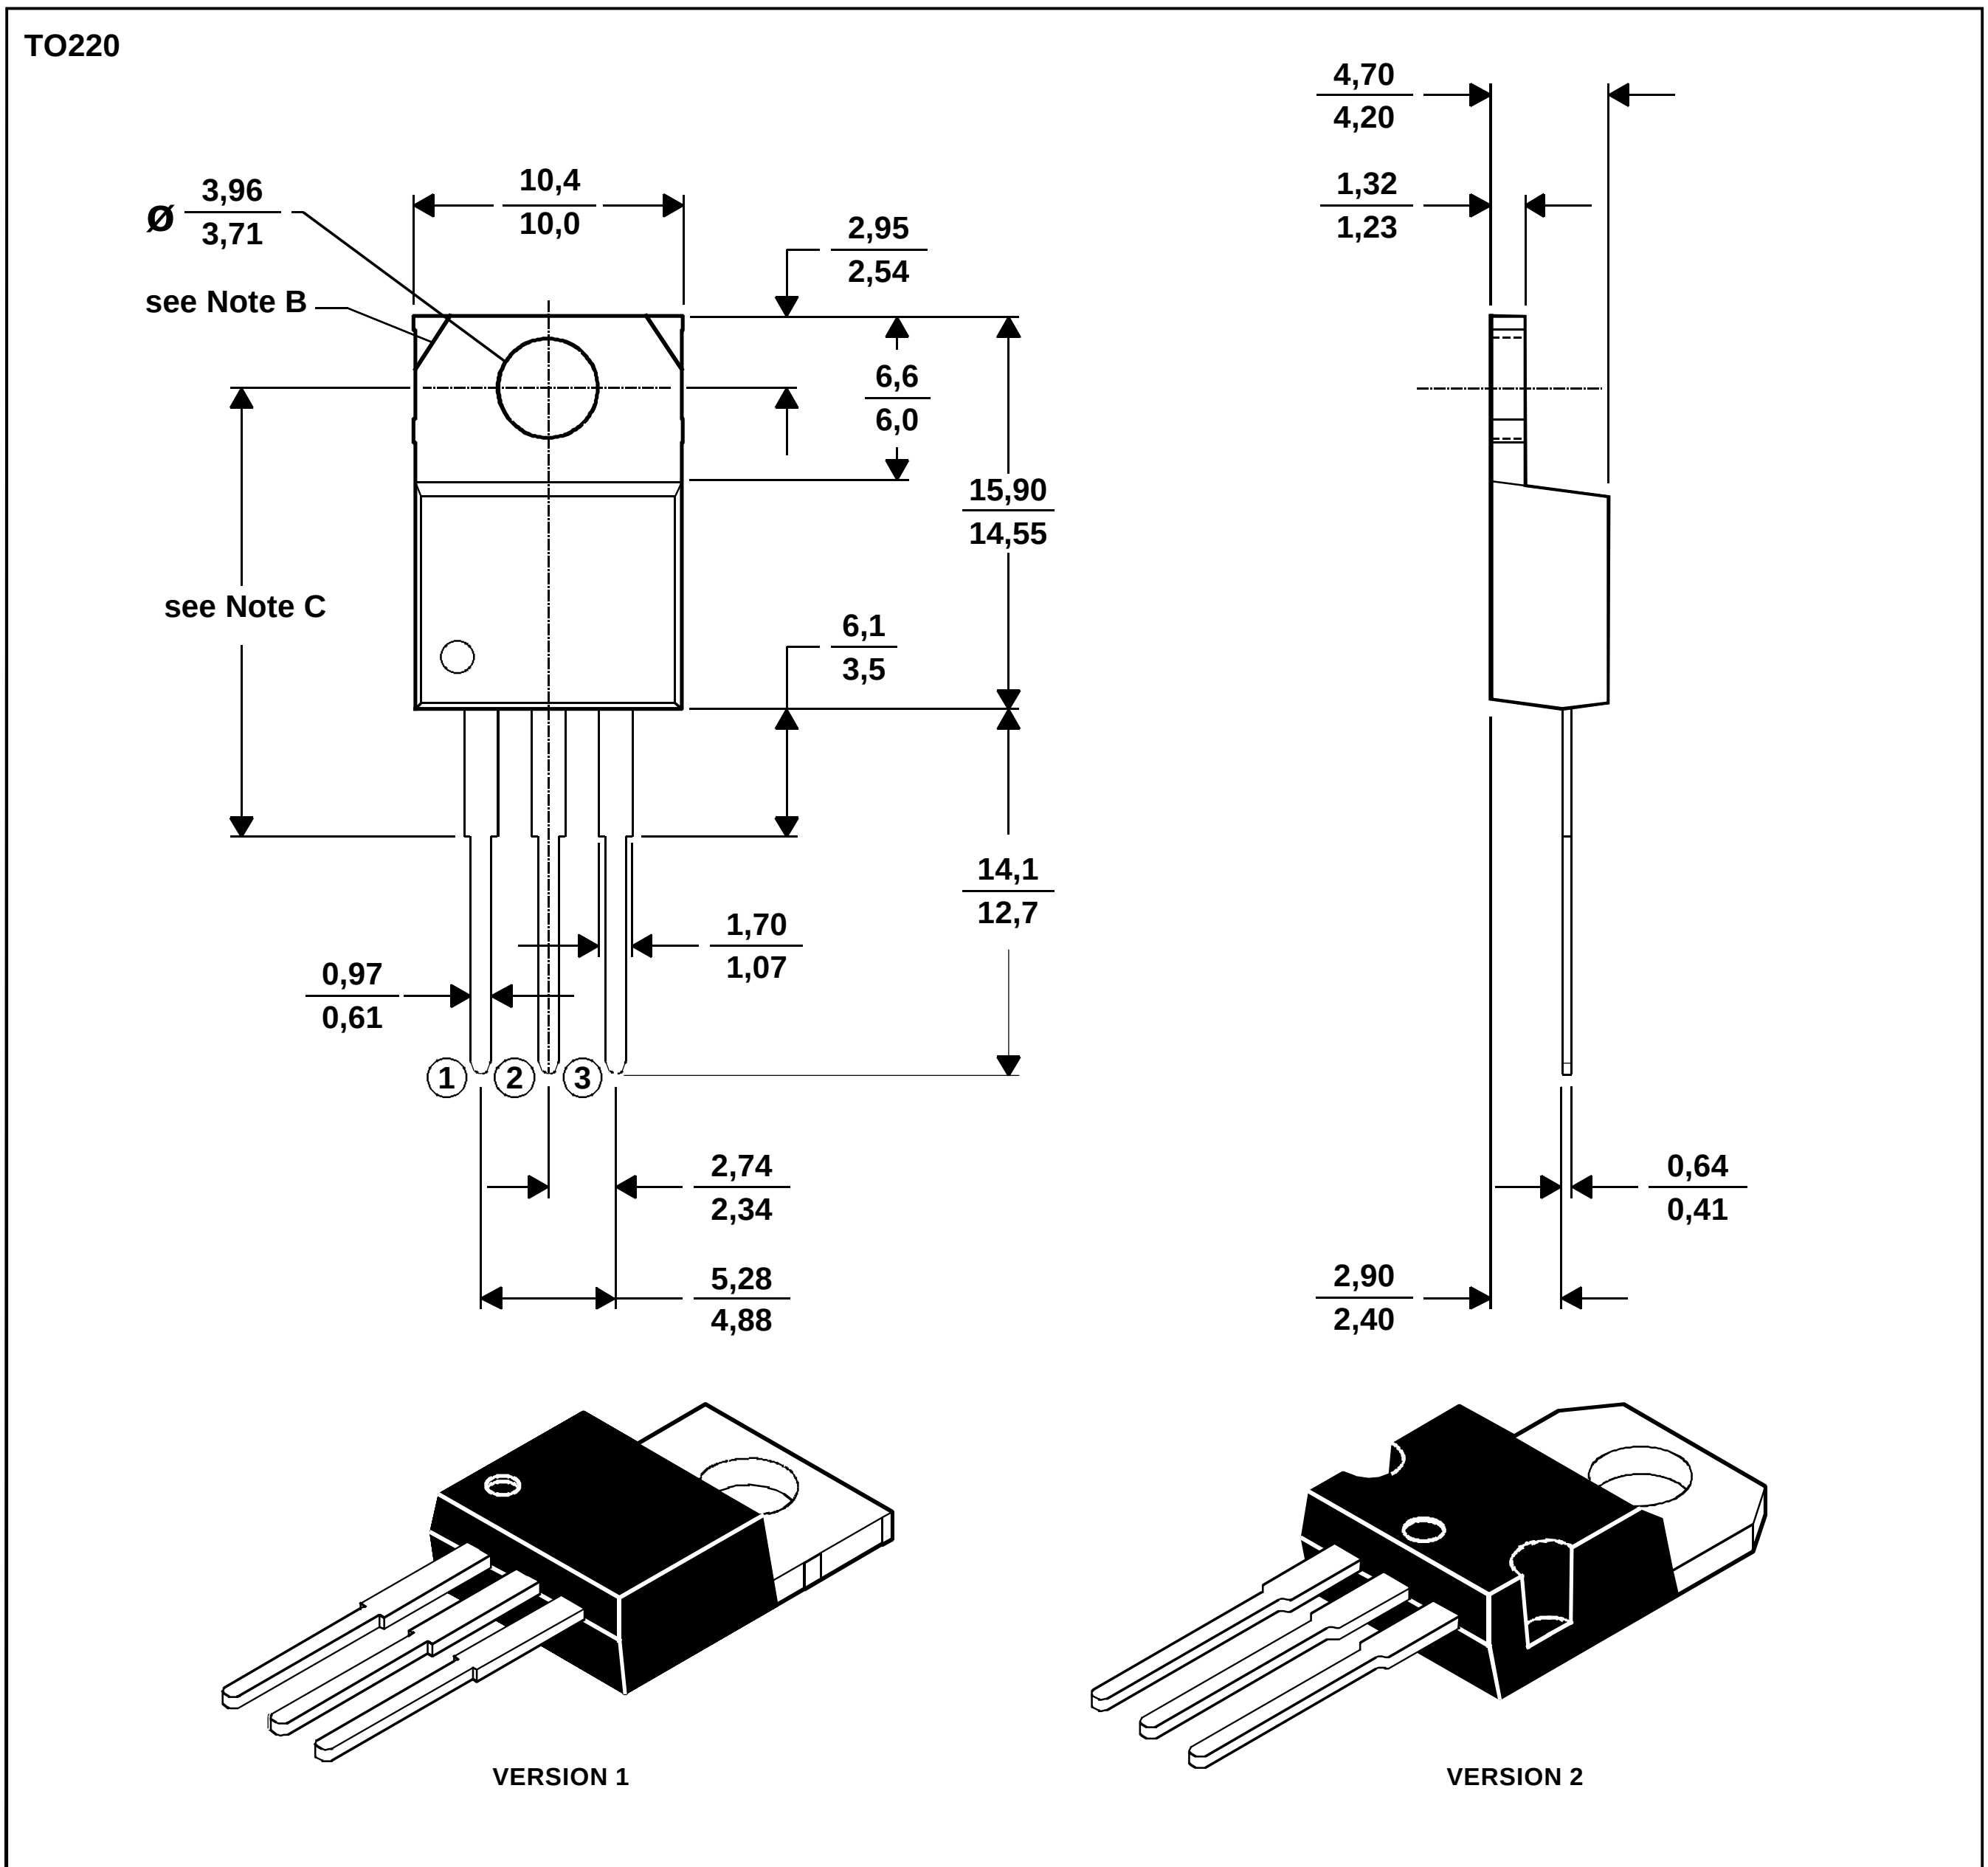

ALL LINEAR DIMENSIONS IN MILLIMETERS

MDXXBE

NOTES: A. The centre pin is in electrical contact with the mounting tab.
B. Mounting tab corner profile according to package version.
C. Typical fixing hole centre stand off height according to package version.
Version 1, 18.0 mm. Version 2, 17.6 mm.

IMPORTANT NOTICE